


Technical information

Luxury Tiles (LT) Floor's structure:


1. PU Protective coating
2. Wear layer
3. Print layer
4. Middle layer
5. Back layer

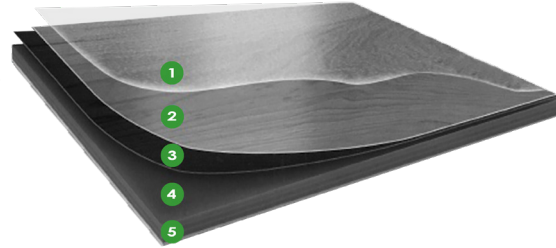

Measurement specification (standard products):


Wood

Size of the tiles: 184 mm × 1219 mm
 Total thickness: 2,5 mm
 M² tiles per package: 3,14 m²

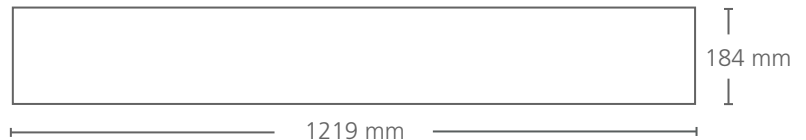

Stone

Size of the tiles: 304 mm × 609 mm
 Total thickness: 2,5 mm
 M² tiles per package: 3,72 m²

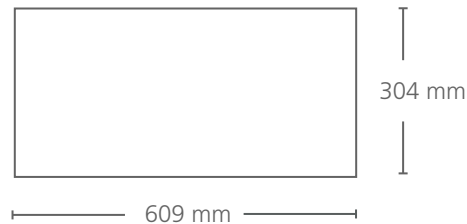

VOC		≤ 0,1%
Wear layer	EN 429	0,15 mm
Total weight	EN 430	4,5 kg/m ²
Classification	EN 685	43
Chemical resistance	EN 423	Pass
Office chair wheel	ISO 4918:2016	Pass
Indentation resistance	EN 433	≤ 0,05 mm
Dimensional stability	ISO 23999-2021	Pass
Flexibility	EN 435	Pass
Wear resistance	EN 660	Group T reduced thickness 0,068 mm
Slip protection	DIN 51130	R9
Noise damping	DIN 52210	4 dB
Light fastness	ISO 2105 B02	> 6
On underfloor heating		Yes, max +27°
Fire rating	EN 13501-1	Bfl - S1
Friction test	EN 13893:2002	Pass

Idé Flooring Sverige AB

C/o Entreprenörsgatan
 Östra Hamngatan 1, 411 10 Göteborg, SWEDEN
 +46 (0)31-68 10 00
 info@ideflooring.se | www.ideflooring.se