

wineo 1500
PURLINE ORGANIC FLOORING

# BEST INGREDIENTS FOR EVERY CHALLENGE

# **CONTENT**

Best ingredients The ecuran organic formula Product advantages Further product advantages Lifecycle cost analysis Application areas Formats Burface structures Product compositions	04 06 08 10 12 14 16 17
Collections	
wineo 1500 wood XS   L   XL wineo 1500 stone XL wineo 1500 wood ∞ wineo 1500 chip ∞ wineo 1500 fusion ∞   fusion XL  Special solutions	20 40 44 50 56
wineo 1500 special products wineo 1500 customised wineo 1500 acoustic ∞ wineo 1500 safety ∞ wineo 1500 rail wineo 1500 sea	62 63 64 65 66 67
Accessories Service Awards and quality Collection overview	68 70 72 74



# BEST INGREDIENTS FOR CREATIVE RESULTS

Unbeatably ecological, limitlessly creative and extremely resilient – that's the new wineo 1500 collection.

wineo PURLINE organic flooring is probably the most ecological, elastic flooring available on the market. Without chlorine, plasticisers or solvents. wineo PURLINE organic flooring impresses not only with its incomparable sustainability, but also with its impressive hard-wearing features and range of designs.

# BEST INGREDIENTS FOR BEST RESULTS

wineo PURLINE organic flooring is a high-quality polyurethane flooring solution made from the finest materials. The basis is provided by ecuran, a high-performance composite material that is manufactured primarily from plant-based oils such as canola oil or castor oil and naturally-occurring mineral components such as chalk. wineo PURLINE organic flooring impresses most of all with its sustainability, combined with its extreme hard-wearing features; furthermore, it is truly made in Germany throughout all of its production stages.







# BEST INGREDIENTS FOR MAXIMUM PERFORMANCE

Sustainable can also be particularly efficient – wineo 1500 not only consists of the best ingredients, but also withstands a great deal. It's simply high-efficiency flooring for heavily stressed areas of application.



# EXTREMELY DURABLE

Even after 25,000 crossings with 500 kg at 6 km/h, wineo 1500 seems totally unimpressed. This was proven by Bielefeld University of Applied Sciences (FH), which even certified the product's suitability for deployment in the light industry. In addition, the high-efficiency flooring excels with an outstanding residual indentation behaviour of ~ 0.05 mm in accordance with EN ISO 24343-1.



# OUTSTANDINGLY UV-RESISTANT

Compared with other floorings in its class, wineo 1500 has very high light fastness of ≥7. EN ISO 105 – B02 therefore certifies the presence of excellent UV resistance.





# PARTICULARLY TEMPERATURE STABLE

wineo 1500 can even withstand heavy spells of heat exposure, for example when there are changes in the room temperature. According to EN ISO 23999, it has a high level of thermostability.



# ABSOLUTELY ODOUR NEUTRAL

The certification agency TÜV Proficert confirms that wineo 1500 is absolutely odour neutral during installation and when in use. There are no disturbing odours.



# EXCEPTIONALLY ECONOMICAL

Up to 30 % savings for the cost of cleaning and resources – thanks to its extremely low lifecycle costs, wineo 1500 is highly economical. This was certified by the Pfiff Institute (page 12).





#### **EASY CARE**

The polyurethane surface makes the wineo 1500 **easy to clean.** 



#### MINIMAL SMOKE

Even in the event of fire, there are **no toxic gases** and hardly any smoke.



#### QUIET

The soft surface ensures pleasantly **quiet acoustics.** 



#### WARM TO THE FEET

**Feels pleasantly warm** and is ideally suited for lying, playing and living on.



## SUITABLE FOR UNDERFLOOR HEATING

Installed over underfloor heating, the wineo 1500 provides **additional** warmth.



#### **SUITABLE FOR DAMP AREAS**

wineo 1500 is ideal for damp areas, such as kitchens or bathrooms as it does not swell on contact with water.



#### **GENTLE ON THE ANKLES**

The elastic surface is gentle on the joints.



#### **SLIP RESISTANT**

The tested surface ensures safety with every step.

# BEST INGREDIENTS FOR LOW COSTS

Resistant to chemical and mechanical stresses, environmentally compatible and particularly easy to clean: wineo PURLINE organic flooring's lifecycle costs are considerably lower than those of all other conventional flooring solutions currently on the market. This has also been confirmed by the Memmingenbased Pfiff Institute for applied industrial cleaning technology.


This is particularly evident in heavily frequented areas such as medical institutions, department stores, schools, airports or other public buildings. wineo PURLINE organic flooring proves to be particularly hard-wearing and economical.

# WHAT THE PFIFF INSTITUTE HAD TO SAY:

- Conventional cleaning agents can be used without problems
- The closed surface makes cleaning particularly easy
- Additional polishing or initial care is unnecessary
- All surface disinfectants can be used
- Various tests demonstrate an effective disinfectability
- Contrast agents normally used in hospitals do not discolour the organic PU flooring
- No impressions left by furniture after a brief regeneration
- No visible wear and tear resulting from mechanical stresses
- Extremely high resistance to direct sunlight

Source: Pfiff Institute for industrial cleaning technology, January 201



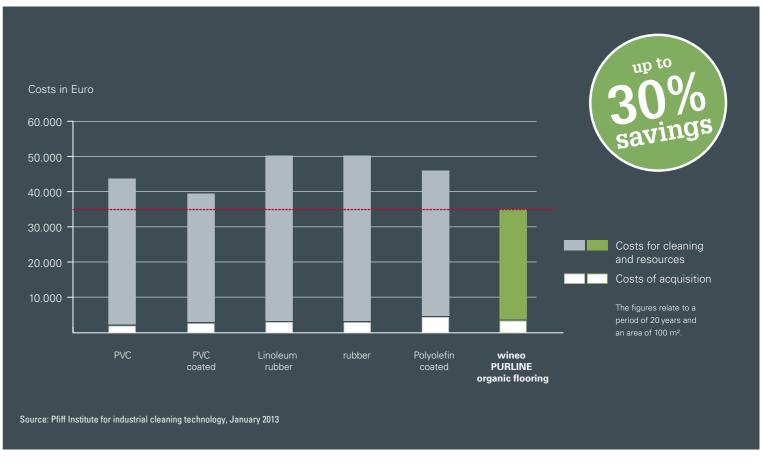

14 Areas of application 15

# BEST INGREDIENTS FOR EVERY AREA OF APPLICATION

The fitting characteristic for every area of application. Be it special standards of hygiene, resilience or design, wineo 1500 is always a perfect partner and convinces by virtue of its special and diverse advantages in all areas.




**HOTEL + HOSPITALITY** 

RECOMMENDED FOR





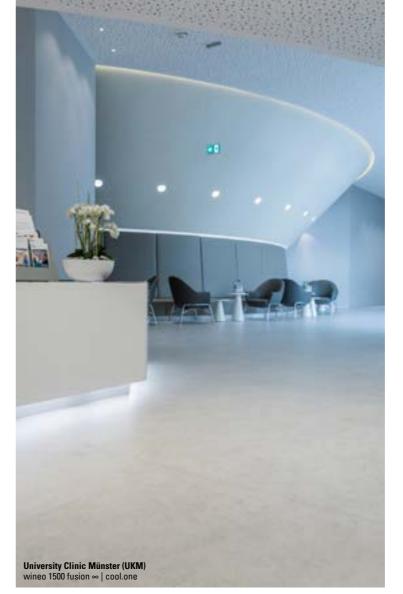





RECOMMENDED FOR PUBLIC + EDUCATION

16 Formats Surface structures 17

# THE SUITABLE FORMAT FOR EVERY APPLICATION


Roll format or practical planks? Both have their individual advantages, are extremely practical for renovation work due to their low structural height of 2.5 mm and have ideal installation attributes.



The flooring for large surfaces – delivered in the standard format 20 x 2 m and to be cut simply using a hook blade. For the ideal installation we recommend fibre-based adhesives.



wineo 1500 as a plank or tile solution is an ideal choice when it comes to individual designs. The XS, L and XL formats can be installed together and thereby offer maximum scope for design options.





# THE ORGANIC FLOORING WITH STRUCTURE

wineo 1500 has a variety of surfaces that are coordinated with the designs. The embossed stone and wood structures provide maximum authenticity. Reference to the respective surfaces can be found under the decor illustration on the following collection pages.





legant wood structure

Fine wood structure








Pine structure

Slate structure

Soft structure



WINEO 1500
FOR MORE SAFETY
Thanks to
its special surface texture,
the R10 offers maximum slip
resistance and safe standing
in every situation.

R

18 Product compositions 19

## **PRODUCT COMPOSITIONS**

Of course the inner values are also crucial. wineo 1500 is convincing in these areas too. With the best ingredients based on the ecuran organic formula. The suitable insulation mat for maximum walking noise reduction is available as an optional extra.

wineo 1500

wood XS | wood L | wood XL | stone XL | wood ∞ | chip ∞ | fusion ∞ | fusion XL | safety



- 1 Top element
  - PU-top layer with surface structure, decor paper & stabilisation with ecuran
- 2 Base layer
  ecuran high-performance composite material
- 3 Backing integrated FleeceTEC-System® for easy and comfortable installation








- 1 Top element
  - PU-top layer with surface structure, decor paper & stabilisation with ecuran
- 2 Base layer
  ecuran high-performance composite material
- 3 Insulation mat
  with integrated insulation mat for an impact sound reduction up to 17 dB

Further information regarding wineo 1500 acoustic ∞ can be found on page 64.



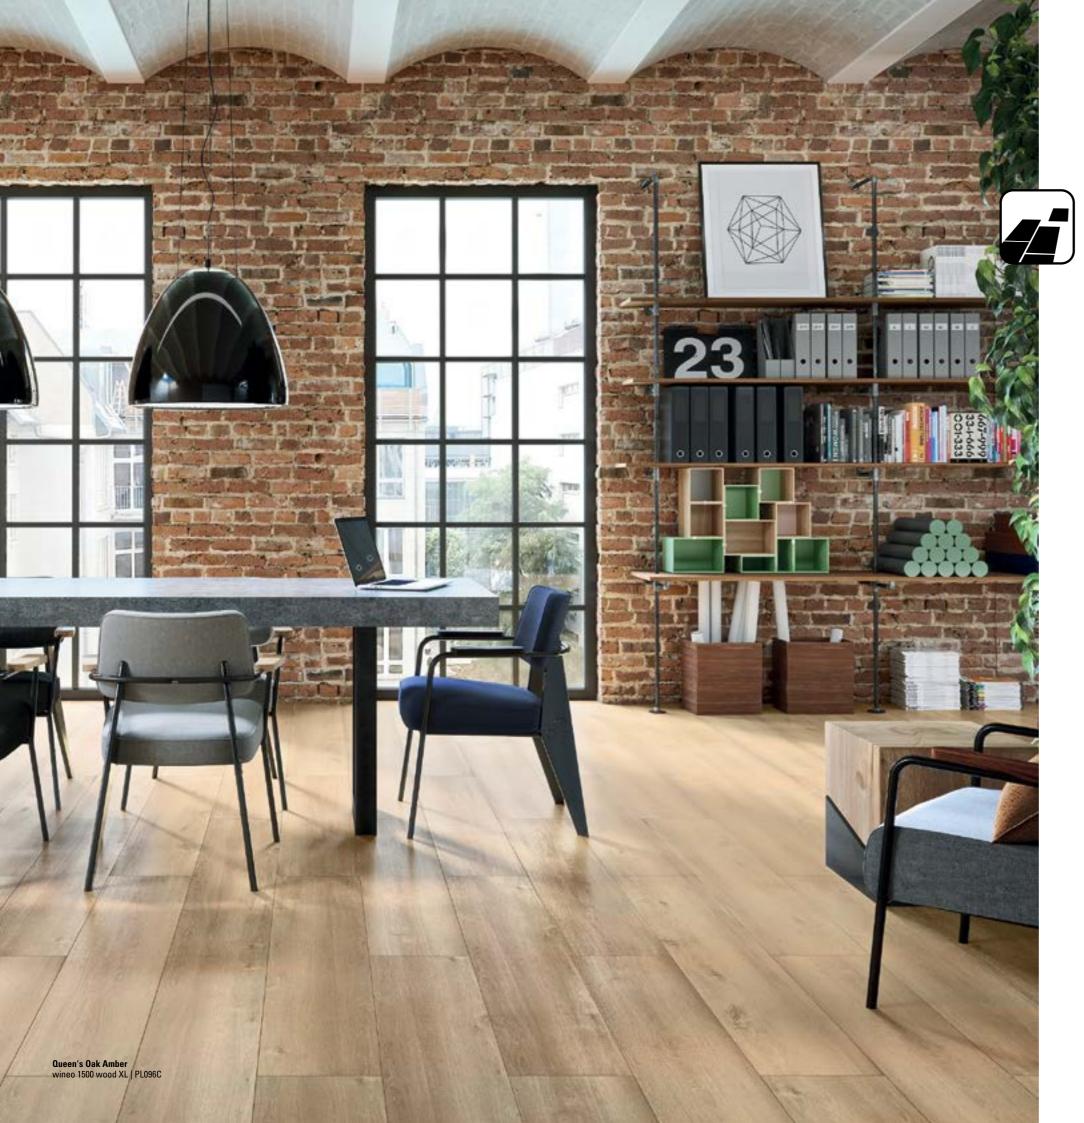

wineo 1500 wood XS | L | XL

# BEST INGREDIENTS FOR CREATIVE RESULTS

wineo 1500 wood convinces with 36 modern and classic wood designs. The three attractive formats offer a range of creative installation options, which range from fish bone to extravagant installation designs.

## wineo 1500 wood XS

**Installation type:** Glue

**Format:**  $600 \times 100 \, \text{mm}$ 



Installed area with the Garden Oak and Island Oak Moon example.



Pure White | PL025C | Elegant wood structure

Skirting board 14.5/50: 30060432



Pure Black | PL194C | Elegant wood structure

Skirting board 14.5/50: 30060598




Garden Oak | PL005C | Elegant wood structure

Skirting board 14.5/50: 30060411



Island Oak Moon | PL045C | Elegant wood structure

Skirting board 14.5/50: 30060519

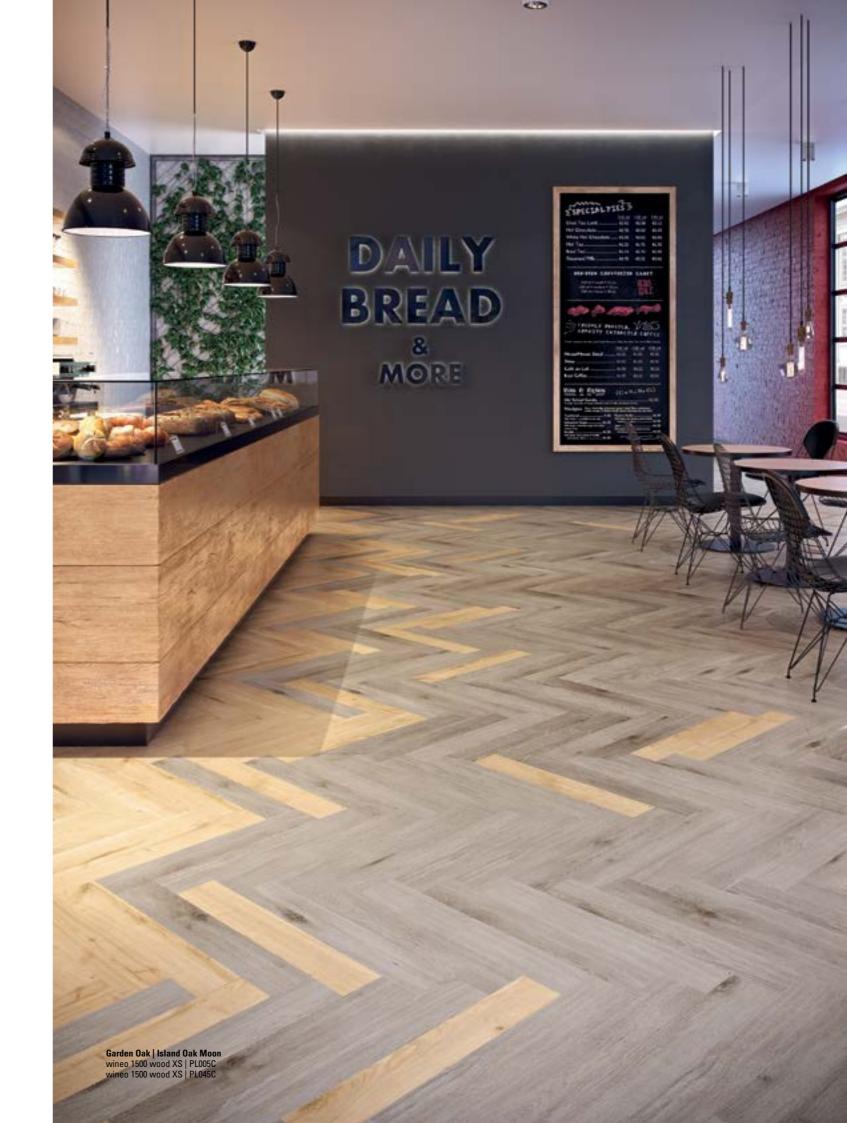

## wineo 1500 wood L

**Installation type:** Glue

Format:  $1200 \times 200 \,\mathrm{mm}$ 

**Product thickness:** 2.5 mm **Content/box:** 20/4.8 m<sup>2</sup>



Installed area Wild Wood



Wild Wood (Installed area) | PL100C | Soft structure

Skirting board 14.5/50: 30060614

## wineo 1500 wood L

**Installation type:** Glue

Format:  $1200 \times 200 \,\mathrm{mm}$ 



Installed area Uptown Pine



Uptown Pine (Installed area) | PL083C | Fine wood structure

Skirting board 14.5/50: 30060613



Installed area Noble Elm



Noble Elm (Installed area) | PL081C | Fine wood structure

Skirting board 14.5/50: 30060611

#### wineo 1500 wood L

**Installation type:** Glue

Format:  $1200 \times 200 \, \text{mm}$ 

**Product thickness:** 2.5 mm **Content/box:** 20/4.8 m<sup>2</sup>



Installed area Canyon Oak with the Canyon Oak Sand example.



Canyon Oak Sand | PL075C | Elegant wood structure

Skirting board 14.5/50: 30060606



Canyon Oak Honey | PL076C | Elegant wood structure

Skirting board 14.5/50: 30060607

#### wineo 1500 wood L

**Installation type:** Glue

Format:  $1200 \times 200 \,\mathrm{mm}$ 



Installed area Classic Oak with the Classic Oak Winter example.



Classic Oak Winter | PL074C | Elegant wood structure

Skirting board 14.5/50: 30060605



Classic Oak Autumn | PL073C | Elegant wood structure

Skirting board 14.5/50: 30060604



Classic Oak Summer | PL072C | Elegant wood structure

Skirting board 14.5/50: 30060603



Classic Oak Spring | PL071C | Elegant wood structure

Skirting board 14.5/50: 30060602

#### wineo 1500 wood L

**Installation type:** Glue

Format:  $1200 \times 200 \,\mathrm{mm}$ 

**Product thickness:** 2.5 mm **Content/box:** 20/4.8 m<sup>2</sup>



Installed area Supreme Oak with the Supreme Oak Grey example.



Supreme Oak Grey | PL070C | Fine wood structure

Skirting board 14.5/50: 30060601



Supreme Oak Silver | PL069C | Fine wood structure

Skirting board 14.5/50: 30060600



Supreme Oak Natural | PL068C | Fine wood structure

Skirting board 14.5/50: 30060599

#### wineo 1500 wood L

**Installation type:** Glue

Format:  $1200 \times 200 \,\mathrm{mm}$ 



Polar Pine (Installed area) | PL082C | Pine structure

Skirting board 14.5/50: 30060612



Pure Pine (Installed area) | PL079C | Pine structure

Skirting board 14.5/50: 30060610

## wineo 1500 wood L

**Installation type:** Glue

Format:  $1200 \times 200 \,\mathrm{mm}$ 





Silver Pine Mixed (Installed area) | PL078C | Pine structure

Skirting board 14.5/50: 30060609



Golden Pine Mixed (Installed area) | PL077C | Pine structure

Skirting board 14.5/50: 30060608



## wineo 1500 wood XL

**Installation type:** Glue

Format:  $1500 \times 250 \,\mathrm{mm}$ 

**Product thickness:** 2.5 mm **Content/box:** 12/4.5 m<sup>2</sup>



Installed area Crystal Pine | all-round V4 joint



Crystal Pine (Installed area) | PL098C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060628

#### wineo 1500 wood XL

**Installation type:** Glue

Format:  $1500 \times 250 \,\mathrm{mm}$ 



Installed area Native Ash | all-round V4 joint



Native Ash (Installed area) | PL099C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060629



Installed area Crafted Oak | all-round V4 joint



Crafted Oak (Installed area) | PL080C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060630

## wineo 1500 wood XL

**Installation type:** Glue

**Format:**  $1500 \times 250 \,\mathrm{mm}$ 

**Product thickness:** 2.5 mm **Content/box:** 12/4.5 m<sup>2</sup>



Installed area Fashion Oak with the Fashion Oak Cream example | all-round V4 joint



Fashion Oak Cream | PL092C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060622



Fashion Oak Natural | PL091C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060621



Fashion Oak Grey | PL093C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060623

#### wineo 1500 wood XL

**Installation type:** Glue

Format:  $1500 \times 250 \,\mathrm{mm}$ 

**Product thickness:** 2.5 mm **Content/box:** 12/4.5 m<sup>2</sup>



Installed area Queen's Oak with the Queen's Oak Pearl example | all-round V4 joint



Queen's Oak Pearl | PL097C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060627

35



 $\textbf{Queen's Oak Amber | } PL096C \mid Elegant wood structure \mid all-round \ V4 \ joint$ 

Skirting board 14.5/50:30060626

## wineo 1500 wood XL

**Installation type:** Glue

Format:  $1500 \times 250 \,\mathrm{mm}$ 

**Product thickness:** 2.5 mm **Content/box:** 12/4.5 m<sup>2</sup>



Installed area Western Oak with the Western Oak Cream example | all-round V4 joint



Western Oak Cream | PL094C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060624



Western Oak Desert | PL095C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060625

#### wineo 1500 wood XL

**Installation type:** Glue

**Format:**  $1500 \times 250 \,\mathrm{mm}$ 



Installed area Royal Chestnut with the Royal Chestnut Grey example | all-round V4 joint



Royal Chestnut Grey | PL084C | Fine wood structure | all-round V4 joint

Skirting board 14.5/50: 30060615



Royal Chestnut Desert | PL085C | Fine wood structure | all-round V4 joint

Skirting board 14.5/50: 30060616



Royal Chestnut Mocca | PL086C | Fine wood structure | all-round V4 joint

Skirting board 14.5/50: 30060617

## wineo 1500 wood XL

**Installation type:** Glue

Format:  $1500 \times 250 \,\mathrm{mm}$ 



Installed area Village Oak with the Village Oak Grey example



Village Oak Grey | PL089C | Elegant wood structure | all-round V4 joint





Village Oak Cream | PL087C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060618



Village Oak Brown | PL088C | Elegant wood structure | all-round V4 joint

Skirting board 14.5/50: 30060619





## wineo 1500 stone XL

# BEST INGREDIENTS FOR MORE STYLE

Classic marble, modern copper and varying industrial designs come together with stylish decors to form the wineo 1500 stone XL. In the modern format 1000 x 500 mm the tiles create a very special atmosphere.

## wineo 1500 stone XL

**Installation type:** Glue

Format:  $1000 \times 500 \, \text{mm}$ 

**Product thickness:** 2.5 mm **Content/box:** 10/5 m<sup>2</sup>


# wineo 1500 stone XL

Installation type: Glue

Format:  $1000 \times 500 \,\mathrm{mm}$ 



Timeless Travertine (Installed area) | PL106C | Soft structure



Just Concrete (Installed area) | PL101C | Soft structure




Urban Copper (Installed area) | PL103C | Soft structure



Carpet Concrete (Installed area) | PL102C | Soft structure



Raw Industrial (Installed area) | PL104C | Soft structure



Scivaro Slate (Installed area) | PL038C | Slate structure



 $\textbf{Grey Marble} \ (Installed \ area) \ | \ PL105C \ | \ Soft \ structure$ 



White Marble (Installed area) | PL090C | Soft structure



**wineo 1500** wood ∞

## BEST INGREDIENTS FOR GOOD BUSINESS

Warm, natural, primal – wineo 1500 wood ∞ includes 8 wood designs for every requirement. From classic oak and walnut to exotic wood designs for a warm and pleasant atmosphere.

## wineo 1500 wood ∞

Installation type: Glue
Format:  $20 \times 2m$ Product thickness: 2.5 mmContent/box:  $1/40 \text{ m}^2$ 



Floating Wood Snow | PLR133C | Soft structure



Floating Wood Sand | PLR134C | Soft structure

## **wineo 1500** wood ∞

Installation type:GlueFormat: $20 \times 2 \,\mathrm{m}$ Product thickness: $2.5 \,\mathrm{mm}$ Content/box: $1/40 \,\mathrm{m}^2$ 



Napa Walnut Cream | PLR135C | Fine wood structure



Napa Walnut Brown | PLR136C | Fine wood structure

## wineo 1500 wood ∞

Installation type:GlueFormat: $20 \times 2m$ Product thickness:2.5 mmContent/box: $1/40 \text{ m}^2$ 



Halifax Oak | PLR036C | Fine wood structure



Pacific Oak | PLR037C | Fine wood structure

## **wineo 1500** wood ∞


Installation type:GlueFormat: $20 \times 2 \,\mathrm{m}$ Product thickness: $2.5 \,\mathrm{mm}$ Content/box: $1/40 \,\mathrm{m}^2$ 



Cottage Oak | PLR038C | Fine wood structure



Missouri Oak | PLR039C | Fine wood structure

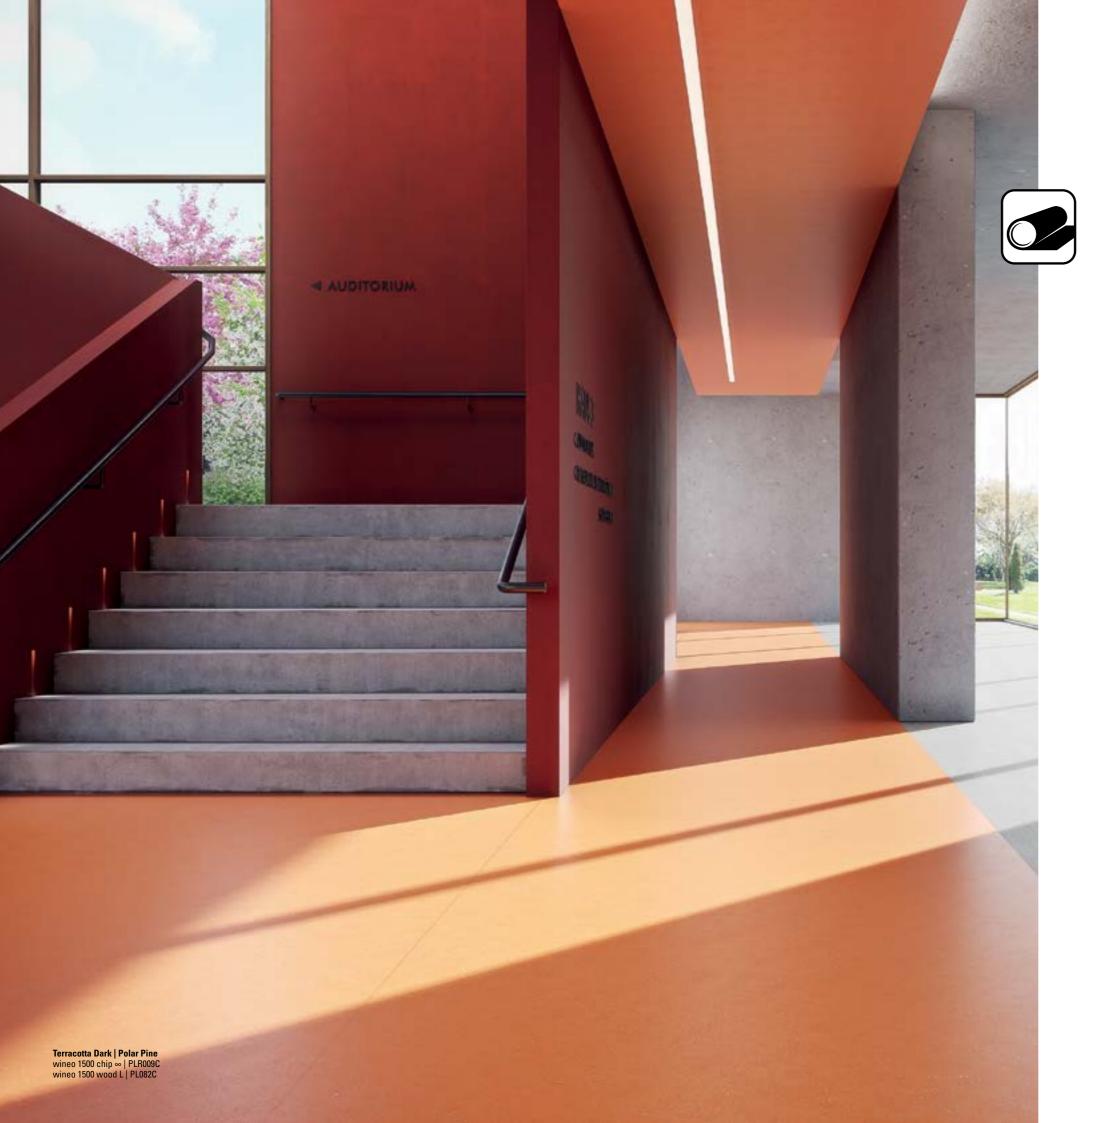


wineo 1500 chip  $\infty$ 

# BEST INGREDIENTS FOR CONVINCING HIGHLIGHTS

Whether plainly coloured, strongly or slightly chipped, in muted beige and grey tones or as a colourful highlight: With 24 designs the wineo 1500 chip ∞ effectively make its mark.

# wineo 1500 chip $\infty$

Installation type:GlueFormat: $20 \times 2 \,\mathrm{m}$ Product thickness: $2.5 \,\mathrm{mm}$ Content/box: $1/40 \,\mathrm{m}^2$ 



Pure White | PLR025C | Soft structure



Sinai Sand | PLR002C | Soft structure



Melange | PLR003C | Soft structure



Pure White Stars | PLR123C | Soft structure



Sinai Sand Stars | PLR130C | Soft structure



Cappuccino | PLR004C | Soft structure

## wineo 1500 chip ∞

Installation type:GlueFormat: $20 \times 2 \,\mathrm{m}$ Product thickness: $2.5 \,\mathrm{mm}$ Content/box: $1/40 \,\mathrm{m}^2$ 




Light Grey | PLR021C | Soft structure



Silver Grey | PLR022C | Soft structure




Midnight Grey | PLR024C | Soft structure



Steel Grey | PLR023C | Soft structure



Silver Grey Stars | PLR124C | Soft structure



Midnight Grey Stars | PLR126C | Soft structure

## wineo 1500 chip ∞

Installation type: Glue
Format:  $20 \times 2m$ Product thickness: 2.5 mmContent/box:  $1/40 \text{ m}^2$ 



Honey Mustard | PLR128C | Soft structure



Red Rubin | PLR011C | Soft structure



Racing Green | PLR019C | Soft structure



Terracotta Dark | PLR009C | Soft structure



Apple Green | PLR185C | Soft structure




Jungle Green | PLR018C | Soft structure

## wineo 1500 chip ∞

Installation type:GlueFormat: $20 \times 2 \,\mathrm{m}$ Product thickness: $2.5 \,\mathrm{mm}$ Content/box: $1/40 \,\mathrm{m}^2$ 



Purple Rain | PLR013C | Soft structure




Navi Blue | PLR129C | Soft structure



Denim Blue Stars | PLR132C | Soft structure



Summer Sky | PLR014C | Soft structure



Navi Blue Stars | PLR131C | Soft structure



Pure Black Stars | PLR127C | Soft structure



wineo 1500 fusion ∞ | fusion XL

# BEST INGREDIENTS FOR SUITABLE DESIGNS

Especially adapted to the needs of architects and planners, the wineo 1500 fusion offers the matching grey tone for all furnishing concepts. Whether light or dark tones, summerly warm or pleasantly cool – the 16 different designs distinguish themselves und integrate perfectly into the existing colour concept of your room.

wineo 1500 fusion is available as a roll (fusion ∞) and as a tile (fusion XL). Thanks to our **match guarantee** you will always find the matching decor even for particularly challenging furnishing elements. Guaranteed.

# BEST INGREDIENTS FOR CLASSY HIGHLIGHTS

The two graphic decors, flowers and ornaments, provide extra highlights. These were colour composed based on the decors in the fusion matrix. In this way, every colour row develops a light and a dark decor variant that you can combine perfectly with all decors from the fusion collection.

We would be happy to advise you.



# flowers












# BEST INGREDIENTS FOR SPECIAL REQUIREMENTS


Special assignments require special solutions. That is why wineo 1500 is also available in other special variants – always individually made to measure for the respective area of application.


PRODUCT  AREAS OF APPLICATION	wineo 1500	wineo 1500 customised	wineo 1500 acoustic ∞	wineo 1500 safety ∞	wineo 1500 rail	wineo 1500 sea
HEALTH+ CARE	1	<b>√</b>	<b>√</b>	<b>√</b>		
HOTEL + Hospitality	1	1	1	1		
PUBLIC + EDUCATION	1	1	1	<b>√</b>		
RETAIL + FAIR	1	1	1	1		
MARITIME		1				<b>√</b>
RAILWAY		1			1	
HOME + LIVING	<b>√</b>	<b>√</b>				

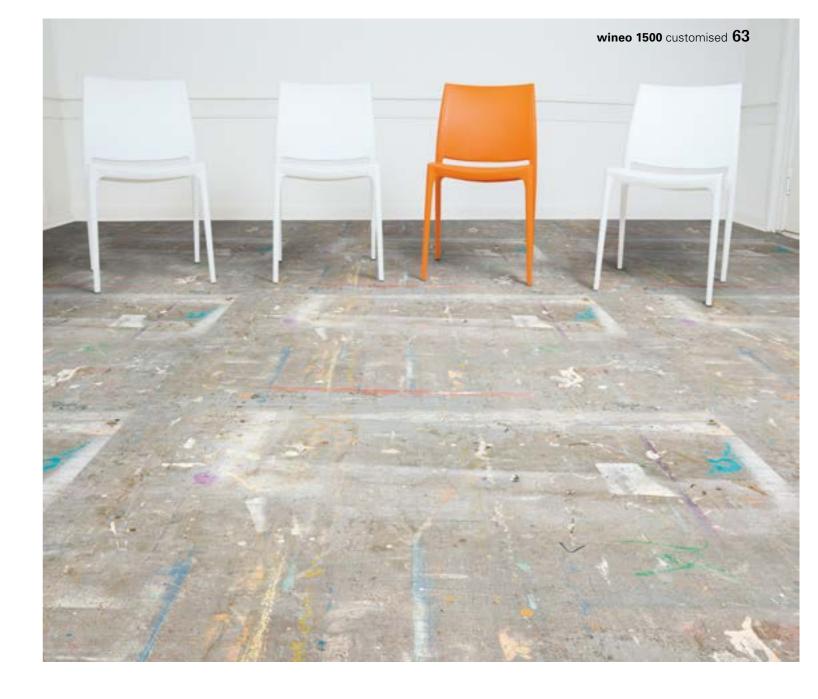

#### wineo 1500 customised

Be it the company logo in the conference room or abstract colours and patterns in the studio, with wineo 1500 customised your creativity will know no bounds. Design the floor you have always wanted, thereby creating your own unique and valuable product.

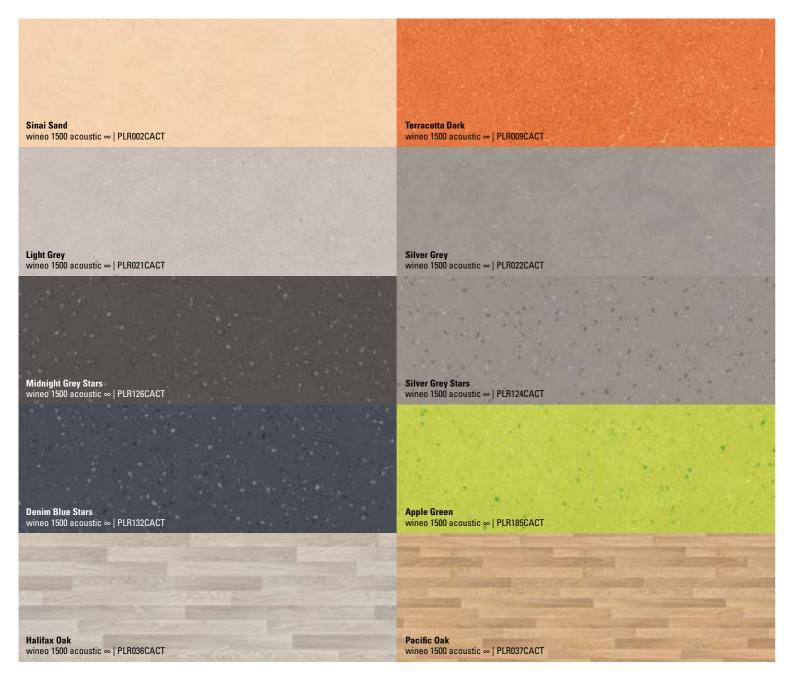

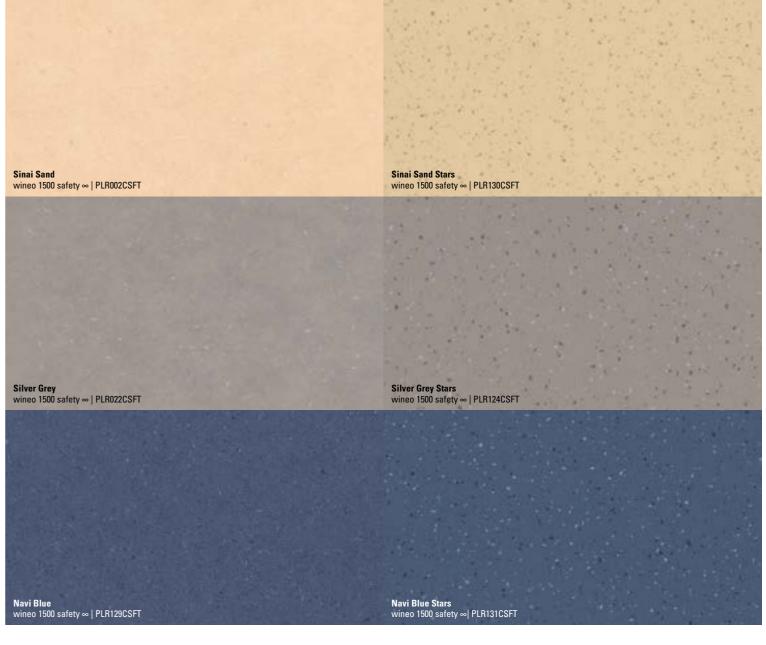

#### wineo 1500 acoustic ∞

Thanks to the integrated insulation mat in wineo 1500 acoustic  $\infty$ , the impact sound is reduced considerably. This makes it particularly suitable for buildings with a high noise level.

You will find the wineo 1500 acoustic ∞ product composition on page 19.

## wineo 1500 safety ∞

Whether it's freshly wiped or you are simply in a hurry, wineo 1500 safety ∞ ensures the greatest possible slip resistance with its special surface. It is R10 and A/B certified and is therefore ideal for hotels, hospitals, nursing care facilities, schools or your workplace.



#### wineo 1500 rail

When thousands of people force themselves through the aisles of a train, that means maximum stress for the materials. To deal with these requirements, we have wineo 1500 rail. It is extremely long-lasting. In doing so, wineo 1500 rail meets all the safety requirements involved.



0045

2018

#### wineo 1500 sea

EN 45545

HL 2

Modern shipbuilding and progressive offshore facilities require a great deal of technical knowledge as well as reliable and, above all, resilient technologies. With these specific requirements in mind, the flooring brand wineo has developed a special flooring solution: wineo 1500 sea. This product offers ideal attributes in the event of fire and fulfills all safely requirements in accordance with the current IMO regulations.

68 Accessories 69

#### **ACCESSORIES**

#### SKIRTING BOARDS, EXTERNAL CORNERS AND FUSE WIRES

Particularly in sensitive areas such as health and care, in which maximum cleanliness and hygiene are crucial, skirting boards and external corners are indispensable. They connect the wall and the floor perfectly, thereby creating a particularly neat and absolutely impermeable final sealing. Our prefabricated skirting boards and external corners for wineo PURLINE organic flooring are available in every design promoted via the collections and are always manufactured for you on an order basis. The associated PURLINE fuse wires for seamless welding, are also available for every design.

#### The available dimensions skirting boards: 100 mm height × 100 mm depth x 2400 mm length external corners: $100 \text{ mm height} \times 100 \text{ mm depth} \times 130 \text{ mm} \times 130 \text{ mm dimension}$ 100 mm 100 mm 100 mm 2400 mm 100 mm







#### **UNDERLAY MATERIAL**

We recommend using our silentPREMIUM insulation mat with wineo 1500 – the ideal underlay material **made from** up to 90% natural raw materials for even more comfort and optimum acoustics.

- No additional adhesive necessary due to the self-adhesive surface
- outstanding and long-lasting impact sound qualities
- punctual conformability
- **■** increased ease of installation
- perfect for underfloor heating
- up to utilisation classes 23 and 32

#### wineo silentPREMIUM insulation mat for wineo 1500



#### COLOUR-MATCHING AND PLAIN-COLOURED SKIRTING BOARDS

For wineo 1500, our range of accessories offer suitable skirting boards that are adjusted optimally for the respective decors. Plain-coloured skirting boards that can be combined universally with all designs are also available. You can find information about the suitable skirting board on the proceeding collection pages and in our accessories brochure.




Skirting board 14.5/50 Recyclate board 14.5 × 50 × 2400 mm VE = 4 units



All of the white skirting boards can be painted on!



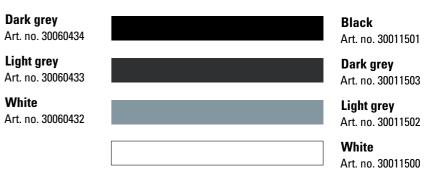

#### **CLIPHOLDER FASTENING SYSTEM**

For a quick and uncomplicated assembly of the wineo skirting boards, we recommend the clipholder fastening system. It facilitates invisible cable routing and can be moved without problems if you want to do some painting or wallpapering.

Dark grey

Light grey

White



Clipholder Art. no. 30020241

VE = 30 clips/approx. 15 running metres Minimum order quantity = 1 VE

#### **SERVICE**

We work with distributors, architects, property developers and anyone who appreciates great floor coverings. That's why we offer a wide range of services. If you would like to be kept regularly up to date, just take a look at YouTube, Facebook, Twitter or Pinterest.




#### **TECHNICAL SUPPORT**

Do you have any questions about our products, where they can be used or regarding installation? Do not hesitate to contact your distributor, they would be happy to help you.



#### **MARKETING SERVICE**

For information and inspiration purposes, we are providing you with an extensive range of patterns and printed matter. You can get an overview of all our presentation tools, from brochures to displays, in our "ADVERTISING WITH WINEO" sales promotion brochure. Of course we can also coordinate with you to fulfil your individual requirements. Don't hesitate to get in touch!

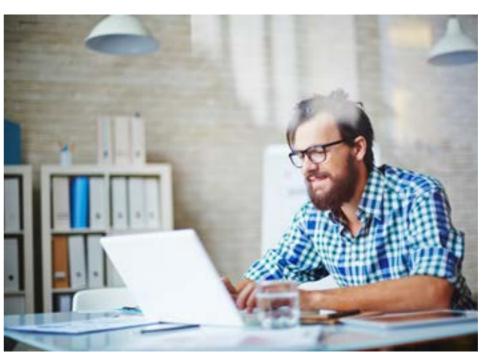

#### **NEWSLETTER**

Stay in touch with us: it's easy to sign up for the wineo newsletter on our website. This will guarantee that you don't miss out on anything and will always be kept up to date.

#### **COMPANY BLOG**

Get some inspiration and find out even more about our products, references and events. Discover it now at:

blog.wineo.de/en



- information and references as well as relevant downloads on the products
- product search by characteristic, colour, format, installation height and utilisation class
- find a retailer
- video portal with plenty of tips and tricks, such as installation instructions



# OUR QUALITY PROMISE

For us, outstanding quality means more than an excellent product. That's why we always provide you with the greatest possible level of transparency. And therefore even more safety.

- Many quality controls from the initial mixing of the ingredients to the completion stage
- Traceability of the exact time of production via a reverse-side overprint
- Outstanding attributes regarding durability, maintenance and safety

# MIMEO

#### **Controlled quality**

From the raw materials supplier to the finished, packed product – wineo flooring must satisfy the most stringent requirements and go through an intensive quality-assurance process. Seven-stage quality control guarantees that our excellent and multiple award-winning quality will continue to set standards in the future as well.

#### High level of responsibility

As a family-run company in its third generation, we carry a high level of social and ecological responsibility. The consistent availability of goods, intensive application and market support, competent advice and permanent new and further development are typical of wineo and create trust and security among our market partners around the world.





www.blauer-engel.de/uz120

#### Der Blaue Engel

The "Blaue Engel" guarantees that our products and services fulfill high standards with regard to their environmental, health-related and consumer-friendly characteristics. For every product group, criteria were established which are checked by the German Federal Environmental Agency every three to four years.



#### TFI-TÜV PROFICERT

The TFI (Textiles & Flooring Institute GmbH) and TÜV Hessen evaluate products from a quality, health and ecological point of view. Essentially, products can only be certified if they present no health risk.



#### Λ.

Just like the "Blue Angel" in Germany, the A+ seal identifies our products as ecological, healthy and user-friendly in the French market.



#### M

Just like the "Der Blaue Engel" (Blue Angel) quality mark in Germany, the M1 seal in the Finnish market labels our products as environmentally friendly, health-friendly and consumer-friendly. The focus is on emissions of Volatile Organic Compounds (VOCs).



#### **KFB**

Award from the competence centre for dynamic processes at Bielefeld University of Applied Sciences (FH). The flooring product Purline has passed the dynamic standard examination of rolling behaviour in accordance with the KFB roadmap.



#### Österreichisches Umweltzeichen

The "Österreichisches Umweltzeichen" (Austrian eco-label) assesses products from quality, health-related and ecological standpoints.

Basically, products can be certified only if they are harmless health-wise. The fulfilment of the criteria is checked every four years.

Materials, solvent emissions, presence of environmentally and health-damaging substances, health-damaging components, emission of heavy metals and other damaging substances.



#### GREENGUARD

The Greenguard certificate ensures that a product fulfills the strictest and most comprehensive requirements for emissions of Volatile Organic Compounds (VOCs) into the air.

# **COLLECTION OVERVIEW**

wineo 1500	wood ∞ chip ∞ fusion ∞ safety ∞	acoustic ∞	wood XS	wood L	wood XL	stone XL fusion XL		
Installation type	Glue	Glue	Glue	Glue	Glue	Glue		
Utilisation classes   EN ISO 10874	23/34/43	23/34/41	23/34/43	23/34/43	23/34/43	23/34/43		
Format	$20 \times 2  \text{m}$	$20\times2\text{m}$	600×100 mm	1200×200 mm	1500×250 mm	1000 ×500 mm		
Product thickness	2.5 mm	4 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm		
Weight	3.6 kg/m <sup>2</sup>	4.2 kg/m <sup>2</sup>	3.9 kg/m <sup>2</sup>	3.9 kg/m <sup>2</sup>	3.9 kg/m <sup>2</sup>	3.9 kg/m <sup>2</sup>		
Content / box	1/40 m²	1/40 m²	28 / 1.68 m <sup>2</sup>	20/4.8 m <sup>2</sup>	12/4.5 m <sup>2</sup>	10/5 m²		
Boxes / pallet	6/240 m²	6/240 m²	144/241.92 m²	48 / 230.4 m²	52 / 234 m²	50 / 250 m²		
staining / chemical resistance EN ISO 26987	very good resistance with regards to concentration and exposure time							
Reaction to fire   EN 13501-1	C <sub>11</sub> - s1							
Anti slip category   DIN 51130	R9 (safety R10)							
Light fastness   EN ISO 105-B02	≥7							
Residual indentation   EN ISO 24343-1	~ 0.05 mm	~ 0.15 mm	~ 0.05 mm	~ 0.05 mm	~ 0.05 mm	~ 0.05 mm		
Slip resistance   EN 13893	$\mu \ge 0,30 \text{ DS}$							
Dimensional stability   EN ISO 23999	~ 0.05 %	~ 0.10 %	~ 0.10 %	~ 0.10 %	~ 0.10 %	~ 0.10 %		
Flexural behaviour   EN ISO 24344	< 20 mm							
Underfloor heating	Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.							
Thermal resistance   ISO 8302	~ 0.01 (m <sup>2</sup> K)/W	~ 0.041 (m <sup>2</sup> K)/W	~ 0.01 (m <sup>2</sup> K)/W					
Effect of a castor chair   EN 425 / ISO 4918	Type W							
Impact sound reduction   EN ISO 10140	~ 4 dB	~ 17 dB	~ 4 dB	~ 4 dB	~ 4 dB	~ 4 dB		
Effect of a furniture leg   EN 424	without damages							
wear resistance   EN 660-2	Group T							
anti-static properties   EN 1815	≤ 2 kV							
Guarantee	en.wineo.de/service/quarantee							

Guarantee en.wineo.de/service/guarantee



Utilisation class 23: Heavy-duty use in the domestic area



Utilisation class 34:
Very heavy-duty use in the commercial sector



Utilisation class 41: Medium use in the light industrial sector (vehicular traffic excluded)



Heavy-duty use in the light industrial sector

Windmöller GmbH

Nord-West-Ring 21 D-32832 Augustdorf

Tel.: +49 (0) 52 37 609 - 0 Fax: +49 (0) 52 37 609 - 309

info@wineo.de

www.wineo.de

Member of



Handed over by:

Product no. 20090978 | 01/2018

