


## Technical information

### Luxury Tiles (LT) Floor's structure:

1. PU Protective coating
2. Wear layer
3. Print layer
4. Middle layer
5. Back layer

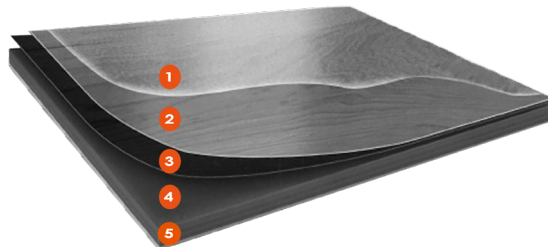

### Measurement specification (standard products):

#### Wood

Size of the tiles: 184 mm × 1219 mm  
 Total thickness: 2,5 mm  
 M<sup>2</sup> tiles per package: 3,14 m<sup>2</sup>



#### Stone

Size of the tiles: 304 mm × 609 mm  
 Total thickness: 2,5 mm  
 M<sup>2</sup> tiles per package: 3,72 m<sup>2</sup>



Wear layer	EN 429	0,55 mm
Total weight	EN 430	4 kg/m <sup>2</sup>
Classification	EN 685	43
Chemical resistance	EN 423	Pass
Office chair wheel	EN 425	Pass
Indentation resistance	EN 433	0,05 mm or less
Dimensional stability	EN 434	Pass
Flexibility	EN 435	Pass
Wear resistance	EN 660	Group T reduced thickness 0,068 mm
Slip protection	DIN 51130	R9
Noise damping	DIN 52210	4 dB
Light fastness	ISO 2105 B02	> 6
On underfloor heating		Yes, max +27°
Fire rating	EN 13501-1	Bfl - S1

#### Idé Flooring Sverige AB

C/o Entreprenörsgatan  
 Östra Hamngatan 1, 411 10 Göteborg, SWEDEN  
 +46 (0)31-68 10 00  
 info@ideflooring.se | www.ideflooring.se