


## Technical information

Luxury Tiles (LT) Floor's structure:

1. PU Protective coating
2. Wear layer
3. Print layer
4. Middle layer
5. Back layer

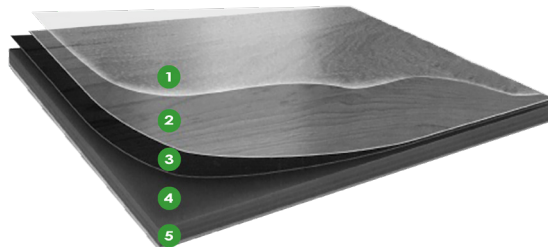

Measurement specification (standard products):

### Wood

Size of the tiles: 228 mm × 1219 mm  
 Total thickness: 2,5 mm  
 M<sup>2</sup> tiles per package: 3,34 m<sup>2</sup>



### Stone

Size of the tiles: 304 mm × 609 mm  
 Total thickness: 2,5 mm  
 M<sup>2</sup> tiles per package: 3,72 m<sup>2</sup>



VOC		≤ 0,1%
Wear layer	EN 429	0,3 mm
Total weight	EN 430	4,5 kg/m <sup>2</sup>
Classification	EN 685	43
Chemical resistance	EN 423	Pass
Office chair wheel	ISO 4918:2016	Pass
Indentation resistance	EN 433	≤ 0,05 mm
Dimensional stability	ISO 23999-2021	Pass
Flexibility	EN 435	Pass
Wear resistance	EN 660	Group T reduced thickness 0,068 mm
Slip protection	DIN 51130	R9
Noise damping	DIN 52210	4 dB
Light fastness	ISO 2105 B02	> 6
On underfloor heating		Yes, max +27°
Fire rating	EN 13501-1	Bfl - S1
Friction test	EN 13893:2002	Pass

### Idé Flooring Sverige AB

Albygatan 136  
 172 65 Sundbyberg, SWEDEN  
 +46 (0)31-68 10 00  
 info@ideflooring.se | www.ideflooring.se